

Product Brief: EoS Smart SFP+ OC-48/STM-16 Ethernet over SONET/SDH


Overview

EoS (Ethernet over SONET/SDH) Smart SFP+ supports transport of Ethernet packets over OC-48/STM-16.

Designed in conformance with the Small Form Factor Pluggable 20-pin Multi-Source Agreement (MSA), EoS Smart SFP+ can replace an existing SFP+ in a router or a switch and transport Ethernet packets across a SONET or SDH network.

By inserting the Plug-and-Play Smart SFP in a free 10GbE port, any router or packet switch can be upgraded to support 2.5 Gbps Packet over SONET/SDH, saving power, space and cost. Additionally, it provides extra flexibility, as any number of SFP+ ports can be upgraded to provide a SONET/SDH network interface.

The integration of the EoS function into an SFP+ greatly reduces system and network complexity, offers lower carbon footprint, and brings CAPEX and OPEX savings.



Application Highlights


- Interconnection of packet switches or routers across a SDH or SONET network
- Fully transparent packet connection

Benefits


- Compact size
- Several optical reaches supported
- Low Carbon footprint
- Total cost reduction



Applications

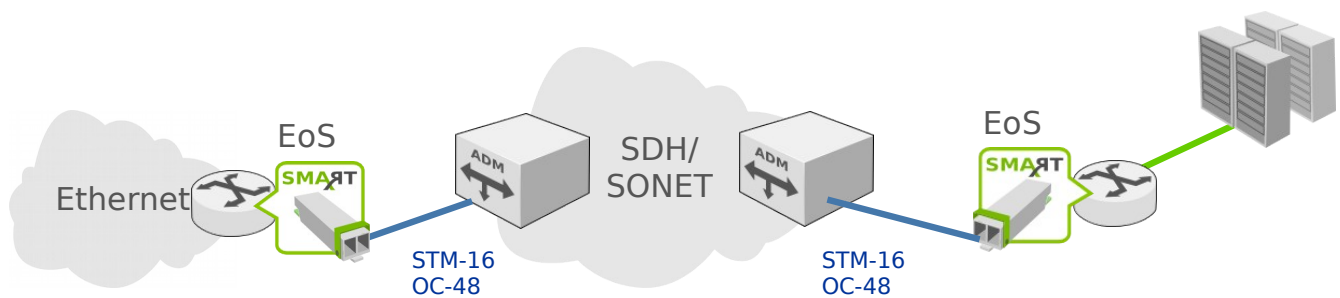

Transport of Ethernet packets over a SONET/SDH network using EoS OC-48/STM-16 Smart SFP

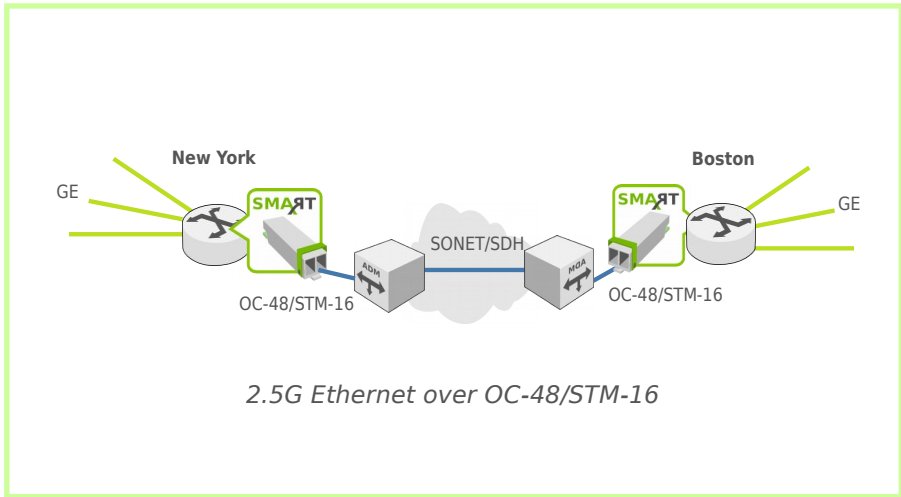

Features

- SFP+ SSF-8431 compliant¹
- DDM SFF-8472 compliant
- Ethernet over SONET/SDH protocol
- Fully transparent packet connection
- Point-to-point link
- 2.5 Gb/s capacity via VC4-16c or STS-48c
- Flow control via PAUSE message
- Low latency
- SONET/SDH line rates:
 - OC-48/STM-16

Interfaces

- Compatible with 10GE SFP+ MSA
- LC duplex connector
- Optical transceiver options
 - Duplex fiber
 - Optical reach: 2 km
- Available operating temperature ranges:
 - Commercial: 0°C to 70°C



Contact Information

Global: sales@oesolution.com
 Europe: sales@aimvalley.nl
 Website: www.smartsfp.com

¹ Exception: power consumption exceeds MSA limit
 v410.35.23 2018-09-20 v1.5

